

www.bomafa.eu



WEDGE GATE VALVES SINGLE AND DOUBLE PLATE ISOLATION VALVES

DESIGN FEATURES OF WEDGE GATE VALVES

- O Fabricated construction
- Valve actuation in accordance to customer's requirements (man. / electr. / hydr. / pneum.)
- O Pressure rating up to 6.0 bar
- Also available for vacuum applications
- Service temperatures up to 500 °C
- O Nominal sizes up to DN 2400

Optional:


- » spring loaded stuffing box
- » drain and inspection hole
- » cleaning hole and pressure screw» internal purging with sealing fluid
- \bigcirc Other sizes or operating conditions on request

DESIGN ADVANTAGES

- Wedge Gate Valves, single or double plate execution, are full bore valves, sealing in both directions
- Valves can be used in clean and dust loaded gas atmosphere
- Metal to metal sealing, with hard faced plate and body seats



Valve closed Position

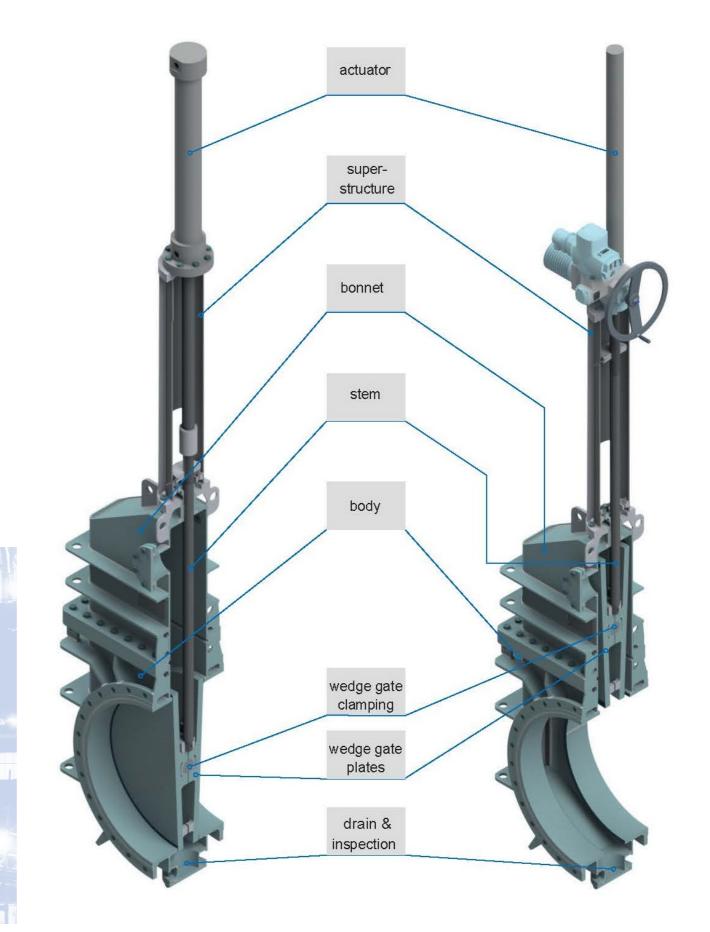

Valve OPENED Position



PRODUCT RANGE



ADDITIONAL PRODUCTS

SNORT VALVES | BACK DRAFT VALVES | BUTTERFLY & LOUVER VALVES NON RETURN VALVES | LINE BLINDS

ADDITIONAL SERVICES

REPAIR SERVICE | REFURBISHMENT & MODIFICATIONS, SPARE PARTS FOR EACH KIND AND BRAND OF VALVES

VEDGE GATE VALVES

The information and specifications contained in this literature are considered accurate. However, they are supplied for informative purposes and should not be considered certified. The products of BOMAFA Group are continually being improved and the specifications, dimensions and information contained in this catalogue are subject to change without notice. For additional information or confirmation, please consult your BOMAFA Group representative.





ISO 9001-2015

Head Office: BOMAFA Oil & Gas GmbH Hohensteinstr. 52 44866 Bochum / Germany

Tel: +49 (0) 2327 992 - 0 Fax: +49 (0) 2327 314 - 43 Email: sales@bomafa.eu Website: www.bomafa.eu

